



## FEATURES

- ▼ Corrosion resistant fiber glass reinforced polyester housing.
- ▼ Available in one lamp and two lamp fluorescent and two lamp and four lamp compact fluorescent.
- ▼ Impact resistant acrylic lens as standard with optional polycarbonate.
- ▼ Non-metallic latches.
- ▼ Available in 120v 60Hz as standard, with optional voltages in 220v 50Hz, 220v 60Hz and 277v 60Hz.
- ▼ 5 year warranty.

## APPROVALS

- ▼ CSA
- ▼ Type 3R Enclosure
- ▼ Enclosed and Gasketed
- ▼ Conforms to IP 65

## APPLICATIONS


- ▼ Marine and wet environments
- ▼ Damp locations
- ▼ Indoor or outdoor use
- ▼ Arduous industrial environments

## OPTIONS

To obtain a fixture with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

▼ Emergency Ballast	EM
▼ Polycarbonate Lens	P
▼ Switch	S
▼ Stainless Steel Latches	SSC
▼ 220v 50Hz	-225
▼ 220v AC 60Hz	-226
▼ 277v AC 60Hz	-276

## DIMENSIONS

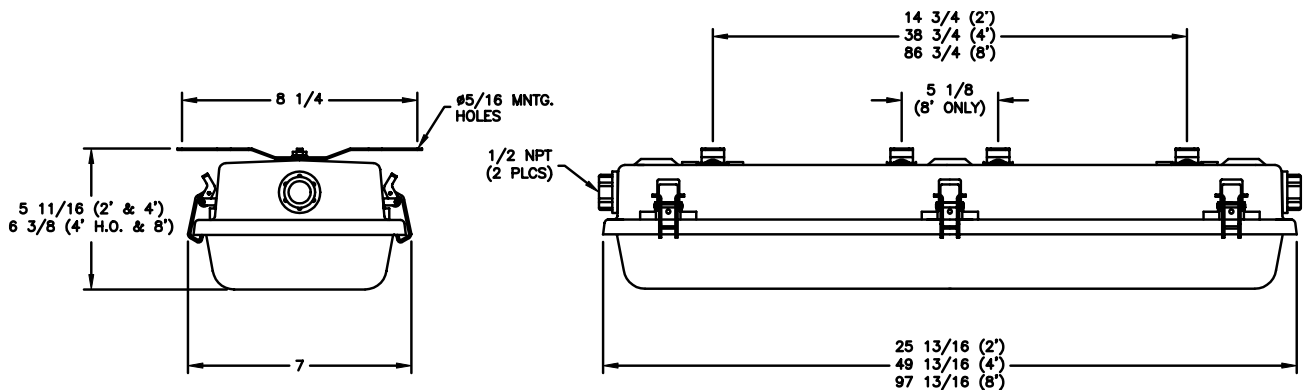

Note: Drawing shown with Stainless Steel Latches (SSC) option.

# MARINE OUTSIDE AND CORROSIVE ENVIRONMENTS GLASS REINFORCED POLYESTER FLUORESCENT AND COMPACT FLUORESCENT



## TECHNICAL SPECIFICATION

### HOUSING AND LENS

Housing in fiber glass reinforced polyester with impact resistant lens in acrylic. Optional polycarbonate lens also available.

### REFLECTORS

Steel channel gloss painted in white.

### GASKETS

One continuous sponge neoprene gasket.

### BALLAST

Supplied in 120v 60Hz as standard. Additional voltage options in 220v 50Hz, 220v 60Hz or 277v 60Hz also available.

### LAMP TYPE

Fixtures are available in 17w, 20w, \*24w, 32w, 40w, \*54w, 60w, 75w and 110w in 2 lamp fluorescent versions. Compact fluorescent versions are available in 2 lamp and four lamp 40w versions. Fixtures are supplied without lamps.

\*Approval pending.

### MOUNTING

Via two stainless mounting brackets, provided with each fixture.

### OUTLETS

Supplied with a 1/2" NPT outlet at each end as standard providing a thru-feed service.

## ORDERING REFERENCES

### FLUORESCENT & COMPACT FLUORESCENT FIXTURES

#### WORKED ORDERING EXAMPLE

2 lamp 32W fluorescent Ceiling mounted      1. FP      2. 2      3. 32

#### 1. SERIES

FP      Fiberglass Reinforced Polyester  
FPC      Compact Fluorescent Lamps (40w)

#### 2. NUMBER OF LAMPS

1      One Lamp  
2      Two Lamps  
4      Four Lamps (CF 40w only)

#### 3. LAMP WATTAGE

17      17 Watt T-8  
20      20 Watt T-12  
\*24      24 Watt T-5  
32      32 Watt T-8  
40      40 Watt T-12  
\*54      54 Watt T-5  
60      60 Watt T-12  
75      75 Watt T-12  
110      110 Watt T-12

\* Approvals pending.

#### 4. OPTIONS

EM      Emergency Ballast  
P      Polycarbonate Lens  
S      Switch  
SSC      Stainless Steel Latches

#### 5. OPTIONAL VOLTAGE/FREQUENCY

Blank      120v AC 60Hz  
-225      220v AC 50Hz  
-226      220v AC 60Hz  
-276      227v AC 60Hz

## SPARE PARTS

### ACRYLIC LENS

2 ft      FX2203  
4 ft      FX2204  
8 ft      FX2225

### LATCHES

Plastic      FX8043

### MOUNTING BRACKETS

Stainless Steel      FX7036

### BALLASTS

1 x 17w	FX5173	2 x 17w	FX5260
1 x 20w	FX5009	2 x 20w	FX5001
1 x 24w	FX5307	2 x 24w	FX5307
1 x 32w	FX5173H	2 x 32w	FX5260H
1 x 40w	FX5011	2 x 40w	FX5004
1 x 54w	FX5305	2 x 54w	FX5305
1 x 60w	FX5027	2 x 60w	FX5027
1 x 75w	FX5098	2 x 75w	FX5062
1 x 110w	FX5027	2 x 110w	FX5093
2 x 40w CF	FX5272		

### LAMP HOLDERS Stationary

17, 20, 32, & 40w	FX4059
24, 54w	FX4064
60w	FX4004 and FX4005
75w	FX4017 and FX4018
110w	FX4004 and FX4005
40w Compact Fluorescent	FX4043

### Spring

### LAMPS

17w Fluorescent	FX3528
20w Fluorescent	FX3506
24w Fluorescent	FX3568
32w Fluorescent	FX3527
40w Fluorescent	FX3504
54w Fluorescent	FX3567
60w Fluorescent	FX3507
75w Fluorescent	FX3523
110w Fluorescent	FX3545
40w Compact Fluorescent	FX3533

