



## FEATURES

- ▼ ATEX approved and certified to UL and CSA standards.
- ▼ Proven water tight construction.
- ▼ 100 to 130V AC/DC or 220 to 277V AC/DC electronic ballast.
- ▼ Cassette re-lamping.
- ▼ Low profile rigid and rugged design.
- ▼ 5 year warranty.

## APPROVALS

- ▼ Class I Zone 1 AEX emd IIC T4 (USA)
- ▼ Ex em II T4 (Zone 1 Canada)
- ▼ -25C to +55C T100°C
- ▼ IP 66 and IP 67
- ▼ Type 4X

## FEATURES



- ▼ Zone 1 hazardous locations
- ▼ Offshore platforms
- ▼ Refineries
- ▼ Pipeline pumping stations
- ▼ Waste water treatment facilities

## Accessories

To obtain a fixture with any of the accessories listed below, please add the following part number to your order:

- |                         |           |
|-------------------------|-----------|
| ▼ Ceiling brackets      | IL042655  |
| ▼ Eye Bolt              | IL041838  |
| ▼ Wall Bracket          | IL043179S |
| ▼ Wire Guard ( 2 foot ) | IL043603  |
| ▼ Wire Guard ( 4 foot ) | IL043593  |

## DIMENSIONS

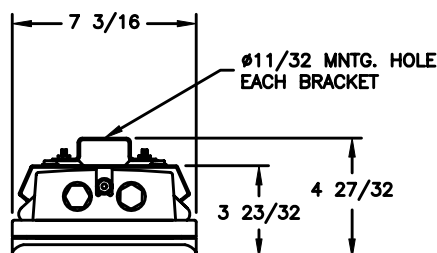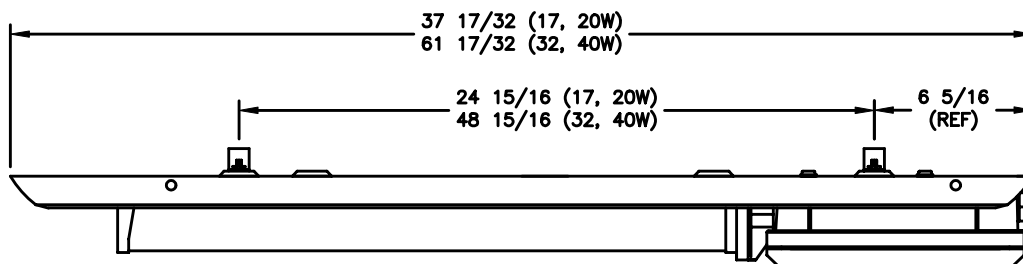

# HAZARDOUS LOCATION CLASS I ZONE 1 ATEX APPROVED

## TECHNICAL SPECIFICATION

### HOUSING

Polycarbonate with white powder coated stainless steel reflector.

### GASKET

One piece silicone.

### TERMINALS

Standard 2 per input to allow feed through wiring.

### INPUT POWER

100 to 130V AC/DC 47-63Hz  
220 to 277V AC/DC 47-63Hz

### LAMP TYPE

F17T8 for 2 foot nominal models  
F32T8 for 4 foot nominal models  
( lamps not supplied)

### CABLE ENTRY

Two M20 X 1.5 threaded entries. M25 hubs optional.

### LAMP HOLDERS

Locking vibration resistant.

### BALLAST

Electronic HF with lamp shut off if lamp cassette removed.

### LENS

High impact polycarbonate.

### MOUNTING

Standard saddle straps provided  
Fixture can be mounted in any position.

## ORDERING REFERENCES

Model	Voltage	Lamp Type	Weight (lbs / kg)
VL19E2-1	100-130	F17T8	14.0 / 6.3
VL19E2-4	220-277		
VL19E4-1	100-130	F32T8	17.2 / 7.8
VL19E4-4	220-277		

### SPARE PARTS

2' Lamp Envelope (Cassette)	<b>IL990789</b>
4' Lamp Envelope (Cassette)	<b>IL990789A</b>
Gasket for Lamp Envelope	<b>IL148372</b>
Gasket for Ballast Housing	<b>IL148375</b>