

FEATURES

- ▼ Corrosion resistant housing in heavy duty extruded copper-free marine grade aluminum with an oven-cured polyester powder coated white high gloss protective finish.
- ▼ Slim fixtures for use as berth / mirror lights and hallway / under counter lights.
- ▼ Available in one lamp 15w, 17w, 20w, 32w and 40w, or two lamp 15w, 17w and 20w.
- ▼ 120v 60Hz voltage operation as standard. 220v 60Hz units are available as an option.
- ▼ Double pole toggle switch.
- ▼ Clear prismatic high impact DR acrylic lens.
- ▼ Supplied with a 125v 3 wire - 2 pole "U" ground convenience outlet.
- ▼ 5 year warranty.

APPROVALS

- ▼ UL 1598A - Marine Inside Type
- ▼ ABS
- ▼ Conforms to IP 50

APPLICATIONS

- ▼ Marine inside environments
- ▼ Accommodation modules / cabin sections
- ▼ Drill ships and exploration vessels
- ▼ Ferries
- ▼ Oil and gas platforms
- ▼ Tankers
- ▼ Passenger ships


OPTIONS

To obtain a fixture with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

- | | |
|--------------------------------------|-------|
| ▼ Fixture without Convenience Outlet | LCO |
| ▼ 220v 60Hz voltage operation | -226* |

*Units not provided with a convenience outlet.

DIMENSIONS

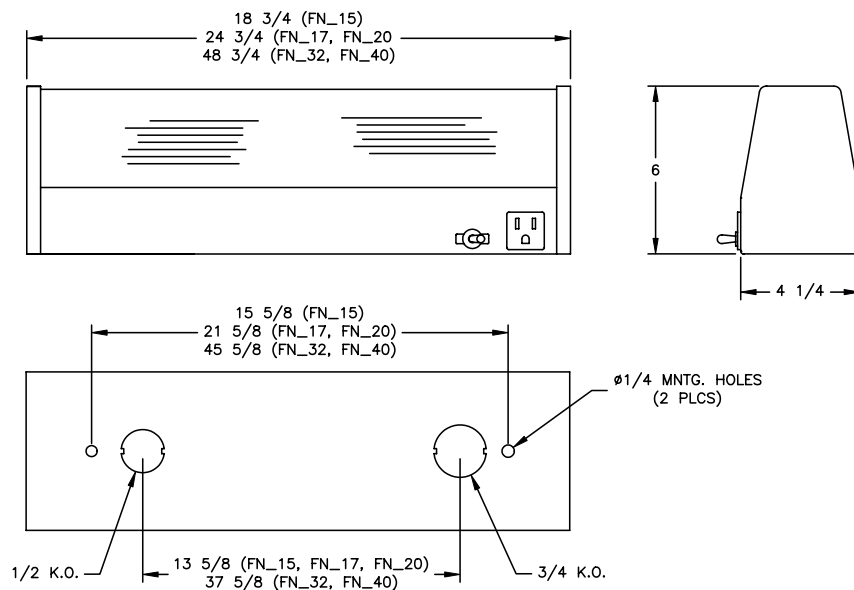

INSIDE TYPE FLUORESCENT BERTH/MIRROR AND HALLWAY/UNDER COUNTER FIXTURES



TECHNICAL SPECIFICATION

HOUSING

Copper-free marine-grade heavy duty extruded aluminum with an oven-cured powder coated white high gloss protective finish and white polycarbonate end caps.

REFLECTOR

Aluminum with a white high gloss polyester powder coated finish.

OUTLETS

All units are supplied complete with one 1/2" and one 3/4" knockout.

LAMPHOLDER

Twist lock lampholders are supplied with each fixture providing shock and vibration resistance.

VOLTAGE OPERATION

Rated for operation on 120v 60Hz as standard.

LAMP TYPE

One or two lamp 15w and 17w T8, one and two lamps 20w T12, one lamp 32w T8 or one lamp 40w T12 fluorescent lamps dependant on type. Lamps not provided.

LENS

A clear prismatic high impact DR acrylic lens is provided.

MOUNTING

Through two 1/4" Ø mounting holes on the back of the fixture.

ORDERING REFERENCES

INSIDE TYPE FLUORESCENT BERTH/MIRROR FIXTURES				SPARE PARTS		
DESCRIPTION	LAMP SIZE	WEIGHT (lbs)	ALUMINUM TYPE	LENS		
Berth and Mirror Fixture	1 x 15w	5.3	FN115	15w		FX2189
	2 x 15w	5.3	FN215	17w or 20w		FX2189-2
Berth and Mirror Fixture	1 x 17w	6.0	FN117	32w or 40w		FX2189-4
	2 x 17w	6.0	FN217			
Berth and Mirror Fixture	1 x 20w	6.3	FN120			
	2 x 20w	6.3	FN220			
Hallway/Under Counter Fixture	1 x 32w	9.0	FN132			
Hallway/Under Counter Fixture	1 x 40w	10.0	FN140			
				BALLASTS	1 x 15w	FX5009
					2 x 15w	FX5001
					1 x 17w	FX5173
					2 x 17w	FX5260
					2 x 20w	FX5001
					1 x 32w	FX5173H
					1 x 40w	Fx5011
				CONVENIENCE OUTLET		CX3001
				LAMPHOLDERS		
				Set of 2		FX4032
				DOUBLE POLE TOGGLE SWITCH		INX3012