



FEATURES

- ▼ Flush mount step light with low profile.
- ▼ Housing and louver frame available in corrosion resistant rugged natural heavy wall cast brass or natural copper-free marine-grade cast aluminum.
- ▼ 814 and 824 models include cover with flush or surface mount louver over a tempered glass lens to reduce glare and direct light to stairs or surface hazard. 816 model includes tempered glass lens only.
- ▼ Choice of corrosion resistant cover with an oven-cured polyester powder coated finishes in dark bronze or anodized grey.
- ▼ Suitable for use with 40w incandescent lamps.
- ▼ 5 year warranty.


APPROVALS

- ▼ UL 1598A - Marine Outside Type Saltwater
- ▼ ABS
- ▼ Conforms to IP 66

APPLICATIONS

- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Gangway/walkway steps
- ▼ Surface level height marking

DIMENSIONS

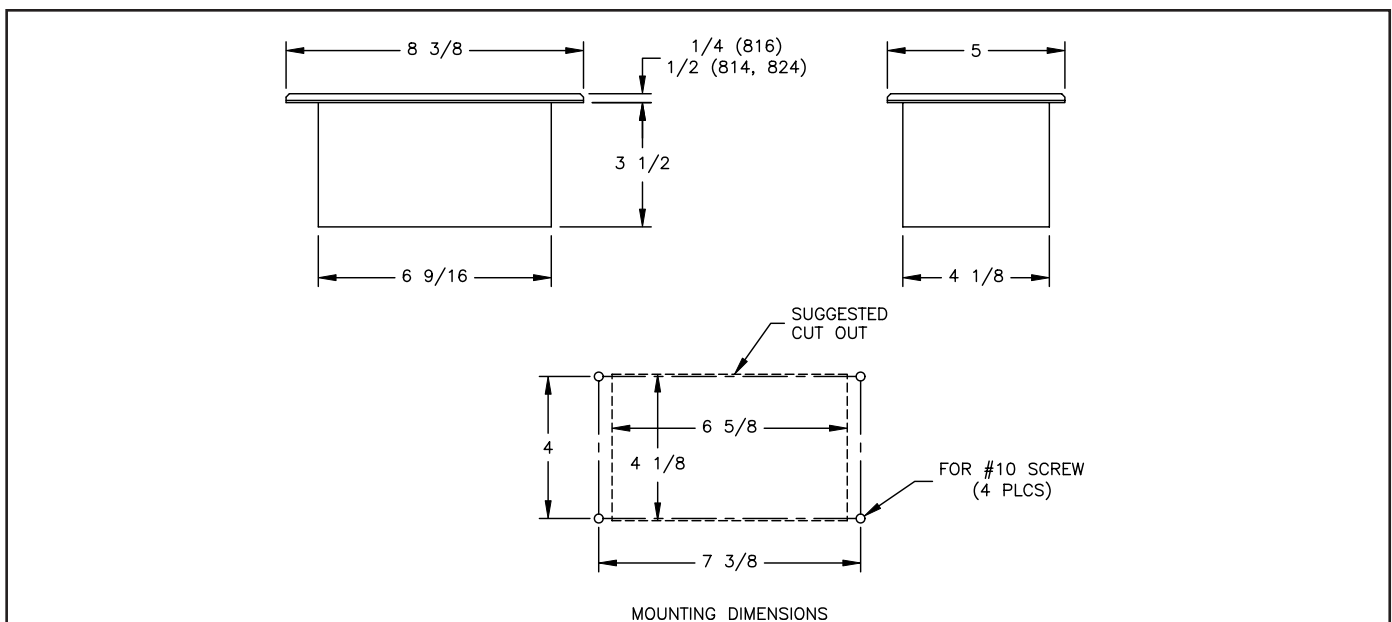

Dimensions in inches

MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS WATERTIGHT STEP LIGHTS



TECHNICAL SPECIFICATION

HOUSING AND LENS FRAME

Available in natural heavy cast brass or natural copper-free marine-grade cast aluminum.

COVERS

Choice of oven-cured polyester powder coated heavy cast brass with a dark bronze protective finish or natural copper-free marine-grade cast aluminum with an anodized grey protective finish.

OUTLETS

All units are supplied undrilled as standard. Optional outlets are available on all sides of the fixture up to a maximum of 1" NPT.

LAMPHOLDER

A porcelain medium base lampholder is supplied as standard.

HARDWARE

Stainless steel.

VOLTAGE OPERATION

All fixtures are supplied rated to operate on 250v AC 60Hz.

LAMP TYPE

The fixture is suitable for lamps up to 40w A-19 maximum. All fixtures are supplied without lamps.

LENS

A clear impact resistant glass lens is provided as standard on louver units. A frosted lens is supplied on plain step light units.

GASKETS

One piece silicone gasket provides an effective seal between the lens and housing.

ORDERING REFERENCES

INCANDESCENT FIXTURES				
DESCRIPTION	LAMP SIZE	ALUMINUM WT (lbs)	BRASS TYPE (B)	ALUMINUM TYPE (A)
Step Light with Surface Louver	40w A-19	9.5	814S	814AS
Step Light Plain Frosted	40w A-19	9.5	816S	816AS
Step Light with Flush Louver	40w A-19	12.0	824S	824AS

SPARE PARTS	
LAMP HOLDERS Porcelain	INX4088
GLASS LENS Surface Louver Plain Frosted Flush Louver	INX2114 INX2002 INX2111
LAMPS 40w A-19	INX3531
GASKETS Lens Frame Mounting	GKT5024 GKT5089