




FEATURES

- ▼ Ceiling (700), Pendant (701) and Wall (702) mount versions available.
- ▼ Corrosion resistant non-metallic high impact material.
- ▼ Wide range of lamp options in 9w, 13w, 18w, 26w and 32w compact fluorescent, medium base 35w and 50w high pressure sodium and 150w max incandescent.
- ▼ Choice of colored globes in amber, blue, green and red.
- ▼ 5 year warranty.

DIMENSIONS

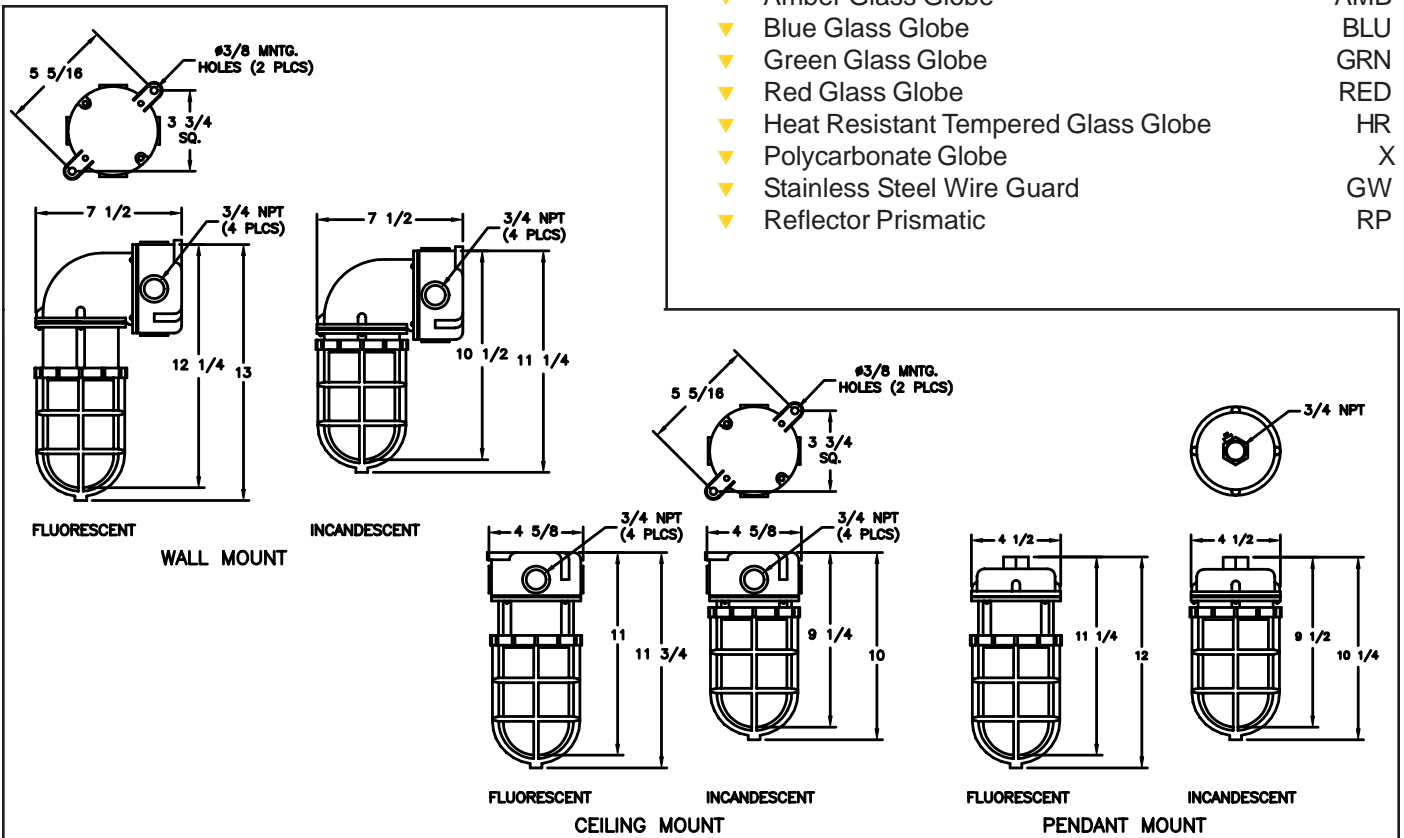

APPROVALS

- ▼ CSA
 - Class I Division 2 Groups A, B, C & D
 - Class I Zone 2 Groups F & G
 - Class III
- ▼ ABS
- ▼ Type 4X
- ▼ Temperature rating for compact fluorescent T3C and incandescent T3
- ▼ Conforms to IP 66

APPLICATIONS

- ▼ Class I Division 2 hazardous locations
- ▼ Class II Division 2 hazardous locations
- ▼ Flour and feed mills
- ▼ Offshore oil and gas platforms
- ▼ Damp, wet or hose down areas
- ▼ Drilling rigs
- ▼ Grain elevators

OPTIONS

To obtain a fixture with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

- ▼ 277v AC 60Hz (compact fluorescent only) -276
- ▼ Amber Glass Globe AMB
- ▼ Blue Glass Globe BLU
- ▼ Green Glass Globe GRN
- ▼ Red Glass Globe RED
- ▼ Heat Resistant Tempered Glass Globe HR
- ▼ Polycarbonate Globe X
- ▼ Stainless Steel Wire Guard GW
- ▼ Reflector Prismatic RP

HAZARDOUS LOCATION CLASS I DIVISION 2 INCANDESCENT, FLUORESCENT AND HID FIXTURES



TECHNICAL SPECIFICATION

HOUSING

Impact and corrosion resistant fiber glass reinforced polyester.

GUARD

Impact and corrosion resistant fiber glass reinforced polyester guard supplied with fixture as standard.

OUTLETS

All junction box units on the ceiling and wall mount versions are supplied with four 3/4" NPT knockouts while the pendant unit is mounted by one 3/4" NPT outlet.

GASKETS

One piece silicone gasket provides lasting protection.

LAMPHOLDER

Polycarbonate lampholders supplied with compact fluorescent. Porcelain lampholders are supplied with both incandescent and high pressure sodium versions.

VOLTAGE

All fixtures are supplied to operate at 120v AC 60Hz as standard. Compact fluorescent units only be supplied to operate on 277v AC 60Hz.

LAMP TYPE

Available in incandescent, medium base High Pressure Sodium and compact fluorescent. Compact fluorescent fixtures are supplied with lamps. All other fixtures are supplied without lamps.

LENS

A clear glass globe is supplied as standard. Optional colored globes are available on request with polycarbonate globe also available.

HARDWARE

Stainless steel.

FIXTURE ORDERING REFERENCES

HID FIXTURES

WORKED ORDERING EXAMPLE

Wall mount, 18w compact fluorescent fixture
120v AC 60Hz with red glass globe

1.	2.	3.	4.
F702	18	Blank	RED

(1) SERIES

CEILING MOUNT

700	Incandescent
S700	High Pressure Sodium
F700	Compact Fluorescent

PENDANT MOUNT

701	Incandescent
S701	High Pressure Sodium
F701	Compact Fluorescent

WALL MOUNT

702	Incandescent
S702	High Pressure Sodium
F702	Compact Fluorescent

(2) LAMP WATTAGE AND TYPE

15 -	150w max incandescent
9 -	9w compact fluorescent
13 -	13w compact fluorescent
18 -	18w compact fluorescent
26 -	26w compact fluorescent
32 -	32w compact fluorescent
35 -	35w high pressure sodium
50 -	50w high pressure sodium

(3) VOLTAGE/FREQUENCY

Blank -	120v 60Hz
276 -	277v 60Hz (Compact Fluorescent only)

(4) GLOBE

Blank	-Clear glass globe
AMB	-Amber Glass globe
BLU	-Blue Glass globe
GRN	-Green Glass globe
RED	-Red Glass globe
HR	-Tempered Glass
X*	-Polycarbonate globe
GW	-Stainless Steel Wire guard
RP**	-Reflector Prismatic

*Guard not provided, available only with GW option.

**Not for use with GW option or wall mount.

SPARE PARTS

PLASTIC GUARD	INXGP150	WIRE GUARD	INXGW150	JUNCTION BOX GASKET	GKT101-0002
LAMP HOLDERS		BALLAST		LAMPS	
9w CF	FX760-9400	35w HPS	INX732-0311	150w Incandescent	INX3558
13w CF	FX4042	50w HPS	INX732-0511	35w HPS medium base	INX3617
18w CF	FX4030	9w CF	FX5086	50w HPS medium base	INX3653
26w CF	FX4034	13w CF	FX5206	9w CF	FX3521
32w CF	FX4034	18w CF	FX5206	13w CF	FX3531
Incandescent	INX755-0930	26w CF	FX5206	18w CF	FX3552
High Pressure Sodium	INX4096	32w CF	FX5206	26w CF	FX3553
				32w CF	FX3554
GLASS GLOBES					
Clear	INX2007CLR	Amber	INX2007YEL		
Red	INX2007RED	Green	INX2007GRN		
Blue	INX2007BLU	Tempered Glass (HR)	INX2007HR		