



FEATURES

- ▼ Choice of corrosion resistant housings in rugged heavy wall cast brass or copper-free marine-grade cast aluminum.
- ▼ Sealed beam 1000w quartz halogen or 500w incandescent lamp options.
- ▼ Medium floodlight as standard with narrow or wide beam pattern options.
- ▼ High impact protective guard available to prevent damage to lamps and lens.
- ▼ Unique SRV floating lamp assembly provides shock and vibration resistance while protecting and helping extend lamp life.
- ▼ Adjustable universal mounting allows flexible positioning through 360° horizontally, vertically down 45° and up to 90° (without handle).
- ▼ Range of colored lens available in red, blue, green and yellow.
- ▼ 5 year warranty.

APPROVALS

- ▼ UL 1598A - Marine Outside Type Saltwater
- ▼ ABS
- ▼ Conforms to IP 66

APPLICATIONS


- ▼ Marine and wet environments
- ▼ Military ships
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Patrol Boats
- ▼ Coast Guard rescue vessels

OPTIONS

To obtain a fixture with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

- | | |
|--|-----|
| ▼ Guard | GRD |
| ▼ Narrow Spot Light Type | NSP |
| ▼ Very Narrow Spot Light Type (1000w only) | VNS |
| ▼ Wide Floodlight Type | WFL |
| ▼ Handle and Clamp | HDL |
| ▼ Red Colored Lens | RED |
| ▼ Blue Colored Lens | BLU |
| ▼ Green Colored Lens | GRN |
| ▼ Yellow Colored Lens | YEL |

DIMENSIONS

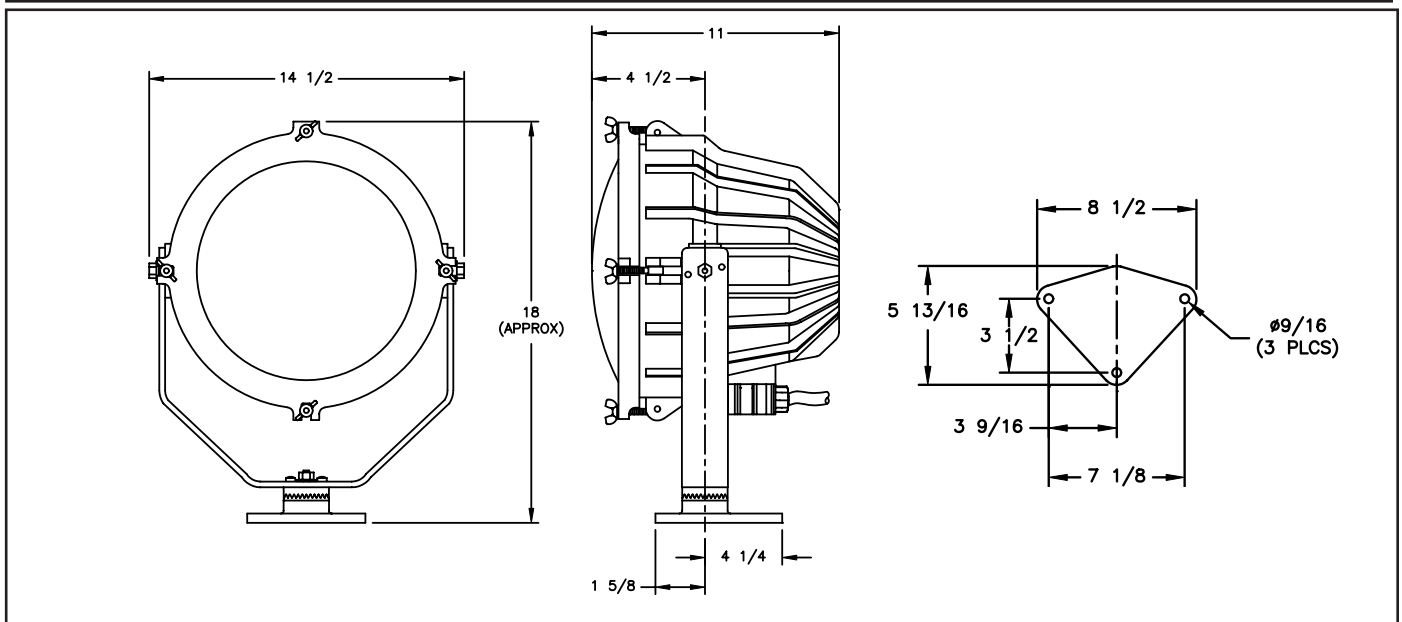

Dimensions in inches

MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS WATERTIGHT SHOCK AND VIBRATION PROOF HALOGEN AND INCANDESCENT FLOODLIGHT



TECHNICAL SPECIFICATION

HOUSING

Available in heavy wall cast brass or copper-free marine-grade cast aluminum with an oven-cured white polyester powder coated protective finish.

GUARD

Optional stainless steel wire guard available.

OUTLETS

All units are supplied complete with six feet of SO cord.

GASKETS

Once continuous piece silicone gasket provides an effective seal between the lens and housing.

HARDWARE

Stainless steel wing nuts for all types.

VOLTAGE OPERATION

Rated for operation on 120v as standard. (For other voltage requirements contact the factory).

LAMP TYPE

A 1000w 120v medium floodlight PAR64 quartz halogen lamp is supplied as standard for halogen units with a 500w 120v medium floodlight PAR64 incandescent lamp supplied for incandescent units.

LENS

Clear heat resistant glass lens. Optional colored lens are available in red, blue, green and yellow.

LAMPHOLDER

Mogul end prong plug-in type lampholders with high temperature leads are supplied as standard.

ORDERING REFERENCES

FLOODLIGHT FIXTURES				
DESCRIPTION	BRONZE TYPE	BRONZE WEIGHT (lbs)	ALUMINUM TYPE	ALUMINUM WEIGHT (lbs)
500w Incandescent	749B	60.0	749A	24.0
1000w quartz halogen	749BQ	60.0	749AQ	24.0

SPARE PARTS	
GUARD	INX1060
LENS	INX2140CLR
To order a colored lens replace the CLR with the appropriate suffix below -	
Red Lens RED	Green Lens GRN
Blue Lens BLU	Yellow Lens YEL
LAMPS	
500w MFL 120v	INX3512
500w NSP 120v	INX3513
500w WFL 120v	INX3634
1000w MFL 120v	INX3514
1000w NSP 120v	INX3534
1000w WFL 120v	INX3649
1000w VNS 120v	INX3652
LENS AND FRAME ASSEMBLY	
Bronze units	INX9051B
Aluminum units	INX9051A
LAMPHOLDER	
Mogul end plug	INX4014
LENS GASKET	GKT1146-32.5
STANDARD MOUNT	
Bronze units	INX7007B
Aluminum units	INX7007A
SWING BOLT/NUT KIT	INX8100
(4 per package)	

