



FEATURES

- ▼ Two pole breaker units are rated for 480v AC or 250v DC while the three pole units are rated for 480v AC only.
- ▼ Choice of corrosion resistant enclosures in heavy wall cast brass or copper-free marine-grade cast aluminum.
- ▼ Interlocking design of the breakers prevents the insertion or removal of the plug while the unit is energized providing added safety.
- ▼ External control handle has provision for padlocking.
- ▼ Receptacles are rated for operation on 125v AC as standard but can be supplied in 250v, 277v, 380v and 480v as an option.
- ▼ 5 year warranty.

APPROVALS

- ▼ ABS
- ▼ Type 4X

APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

OPTIONS

To obtain a fixture with one of the following options listed below add the following suffix (not all options can be combined):

- ▼ 250v Receptacle -250 (Replace -125)
- ▼ 277v Receptacle -277 (Replace -125)
- ▼ 380v Receptacle -380 (Replace -125)
- ▼ 480v Receptacle -480 (Replace -125)

DIMENSIONS

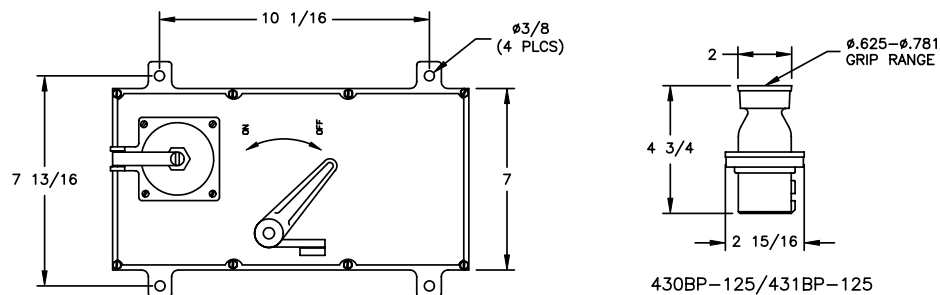

2460B-125/2470B-125
2462B-125/2472B-125
2464B-125/2474B-125
2466B-125/2476B-125

MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS WATERTIGHT COMBINATION RECEPTACLE AND BREAKER



TECHNICAL SPECIFICATION

HOUSING

Heavy wall cast brass or copper-free marine-grade cast aluminum with a natural finish.

HARDWARE

Stainless steel for all types.

OUTLETS

All units are furnished blank but can be supplied with up to four 1 1/2" NPT outlets. Please state requirements on application.

RECEPTACLES

2P3W or 3P4W units are available.

MOUNTING

Surface mounted via four 3/8" Ø mounting holes.

PLUG

For safety reasons plugs can only be inserted or removed while the units are turned off.

VOLTAGE OPERATION BREAKERS

Two pole breakers are all rated for operation on 480v AC or 250v DC while the three pole breakers are for operation on 480v AC only.

RECEPTACLES

Supplied to operate on 125v AC as standard. Other optional voltages available are 250v AC, 277v AC, 380v AC or 480v AC. See options for ordering codes.

ORDERING REFERENCES

BREAKERS AND PLUGS

DESCRIPTION	BRASS WEIGHT (lbs)	2P3W BRASS TYPE (B)	2P3W ALUMINUM TYPE (A)	3P4W BRASS TYPE (B)	3P4W ALUMINUM TYPE (A)
15 Amp Breaker	31.5	2460B-125	2460A-125	2470B-125	2470A-125
20 Amp Breaker	31.5	2462B-125	2462A-125	2472B-125	2472A-125
30 Amp Breaker	31.5	2464B-125	2464A-125	2474B-125	2474A-125
40 Amp Breaker	31.5	2466B-125	2466A-125	2476B-125	2476A-125
Plug	2.8	430BP-125	430AP-125	431BP-125	431AP-125

SPARE PARTS

2 POLE BREAKERS		3 POLE BREAKERS		BOXES	
15 Amp	INX3086	15 Amp	INX3093	Brass	INX6041B
20 Amp	INX3087	20 Amp	INX3094	Aluminum	INX6041A
30 Amp	INX3088	30 Amp	INX3095	COVERS WITH HANDLE	
40 Amp	INX3089	40 Amp	INX3096	Brass	INX6650B
GASKET	GKT5005	CAPS		Aluminum	INX6650A
2P3W INTERIORS		Bronze	INX8030B		
Plug	INX3073	Aluminum	INX8030A		
Receptacle	INX3043	3P4W INTERIORS			
		Plug	INX3074		
		Receptacle	INX3057		