



## FEATURES

- ▼ Double pole rotary switches rated for operation on 20 Amp 240v AC max, supplied standard on some models.
- ▼ Choice of corrosion resistant enclosures in heavy wall cast brass or copper-free marine-grade cast aluminum.
- ▼ Receptacles are supplied with 2P3W (U-Ground, Straight Blade type) 125v AC 15/20 Amp interior. 250v AC units are available as an option.
- ▼ Receptacles will accept 15 or 20 Amp plugs.
- ▼ 5 year warranty.

## APPROVALS

- ▼ ABS
- ▼ NEMA 5-15R, 6-15R, 5-20R, 6-20R
- ▼ Type 4X
- ▼ Conforms to IP 66

## APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

## OPTIONS

To obtain a fixture with one of the following options listed below replace the following suffix:

- ▼ 250v AC -250 (Replace -125 suffix)

## DIMENSIONS

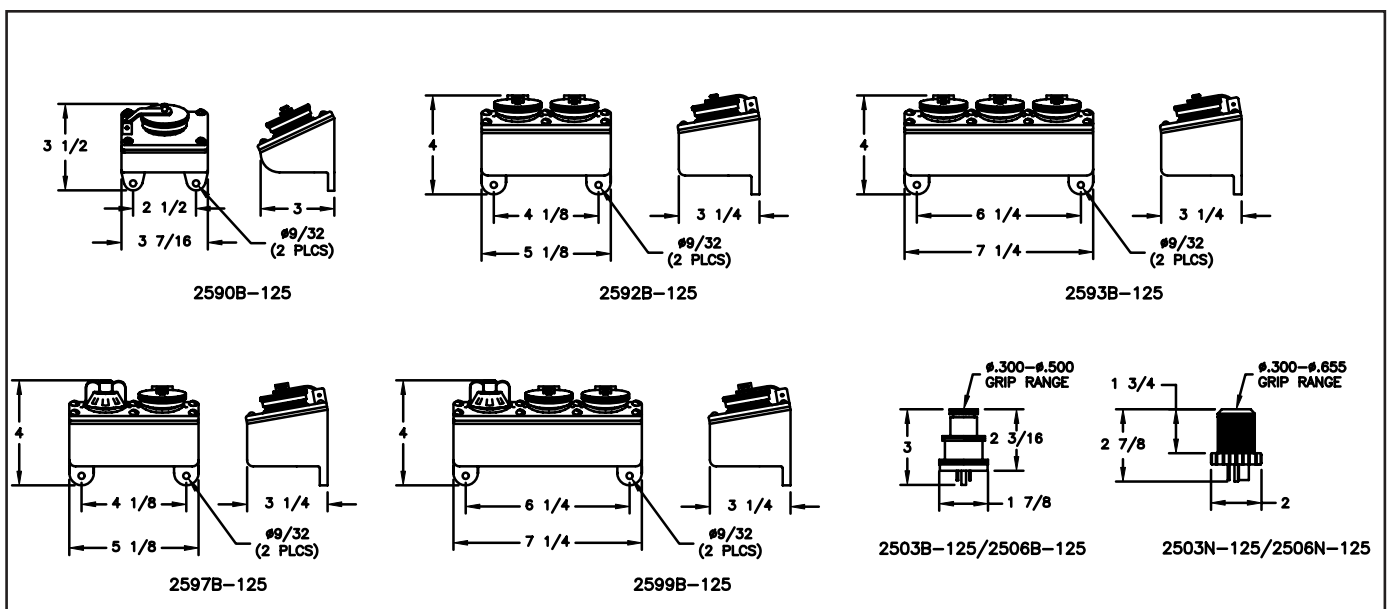

Dimensions in inches

# MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE MOUNT



## TECHNICAL SPECIFICATION

### HOUSING

Heavy wall marine grade brass or copper-free marine-grade aluminum with a natural finish.

### HARDWARE

Stainless steel for all types

### OUTLETS

All units are furnished blank but can be supplied with up to two 3/4" NPT outlets. Please state requirements on application.

### VOLTAGE OPERATION SWITCHES

Double pole rotary switches are available for operation up to 20 Amp 240v AC max.

### RECEPTACLES

Supplied with a 2P3W U-Ground Straight Blade type 125v AC 15/20 Amp interior.

## ORDERING REFERENCES

### MARINE WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE MOUNT

DESCRIPTION	AMP	BRASS (B)	BRASS WT (lbs)	ALUMINUM (A)	ALUMINUM WT (lbs)
One Receptacle	20	2590B-125	3.0	2590A-125	1.0
Two Receptacles	20	2592B-125	5.0	2592A-125	1.8
Three Receptacles	20	2593B-125	7.0	2593A-125	2.5
One Receptacle with Double Pole Switch	20	2597B-125	4.0	2597A-125	1.5
Two Receptacles with Double Pole Switch	20	2599B-125	6.0	2599A-125	2.1
Metal Plug	15	2503B-125	0.8	2503A-125	0.8
	20	2506B-125	0.8	2506A-125	0.8
Nylon Plug	15	2503N-125	0.5	2503N-125	0.5
	20	2506N-125	0.5	2506N-125	0.5

## SPARE PARTS

COVERS	BRASS (B)	ALUMINUM (A)	KNOB AND SHAFT ASSEMBLY	
One Receptacle	INX6526B	INX6526A	Brass	INX8002B
Two Receptacles	INX6527B	INX6527A	Aluminum	INX8002A
Three Receptacles	INX6528B	INX6528A		
One Receptacle with Switch	INX6529B	INX6529A	<b>15 AMP 125V INTERIORS</b>	
Two Receptacles with Switch	INX6530B	INX6530A	Nylon Plug	2503NR-125
<b>BOXES</b>	<b>BRASS (B)</b>	<b>ALUMINUM (A)</b>	<b>15 AMP 250V INTERIORS</b>	
			Nylon Plug	2503NR-250
			<b>20 AMP 125V INTERIORS</b>	
			Receptacle	INX3181
			Nylon Plug	2506NR-125
<b>GASKETS</b>			<b>20 AMP 250V INTERIORS</b>	
			Receptacle	INX3182
			Nylon Plug	2506NR-250
			<b>CAPS</b>	
			Bronze	INX8008B
Aluminum	INX8008A			
<b>SWITCHES</b>				
Double Pole	INX3192			