



## FEATURES

- ▼ Double pole rotary switches rated for operation on 20 Amp 240v AC max supplied standard on some models.
- ▼ Choice of corrosion resistant enclosures in heavy wall cast brass or copper-free marine-grade cast aluminum.
- ▼ Receptacles are rated for operation on 125v AC. The 2P3W units can be supplied in 250v, 277v and 480v AC versions while the 3P4W units can be supplied in 208v, 250v, 480v or 600v AC versions.
- ▼ Single gang units available in reverse service as an option.
- ▼ 5 year warranty.

## APPROVALS

- ▼ ABS
- ▼ Type 4X
- ▼ Conforms to IP 66

## APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

## OPTIONS

To obtain a fixture with one of the following options listed below add the following suffix (not all options can be combined):

- ▼ 208v (3P4W units only) -208 (Replace -125)
- ▼ 250v (All units) -250 (Replace -125)
- ▼ 277v (2P3W units only) -277 (Replace -125)
- ▼ 480v (All units) -480 (Replace -125)
- ▼ 600v (3P4W units only) -600 (Replace -125)
- ▼ Reverse Service (Single gang units only) RS

## DIMENSIONS

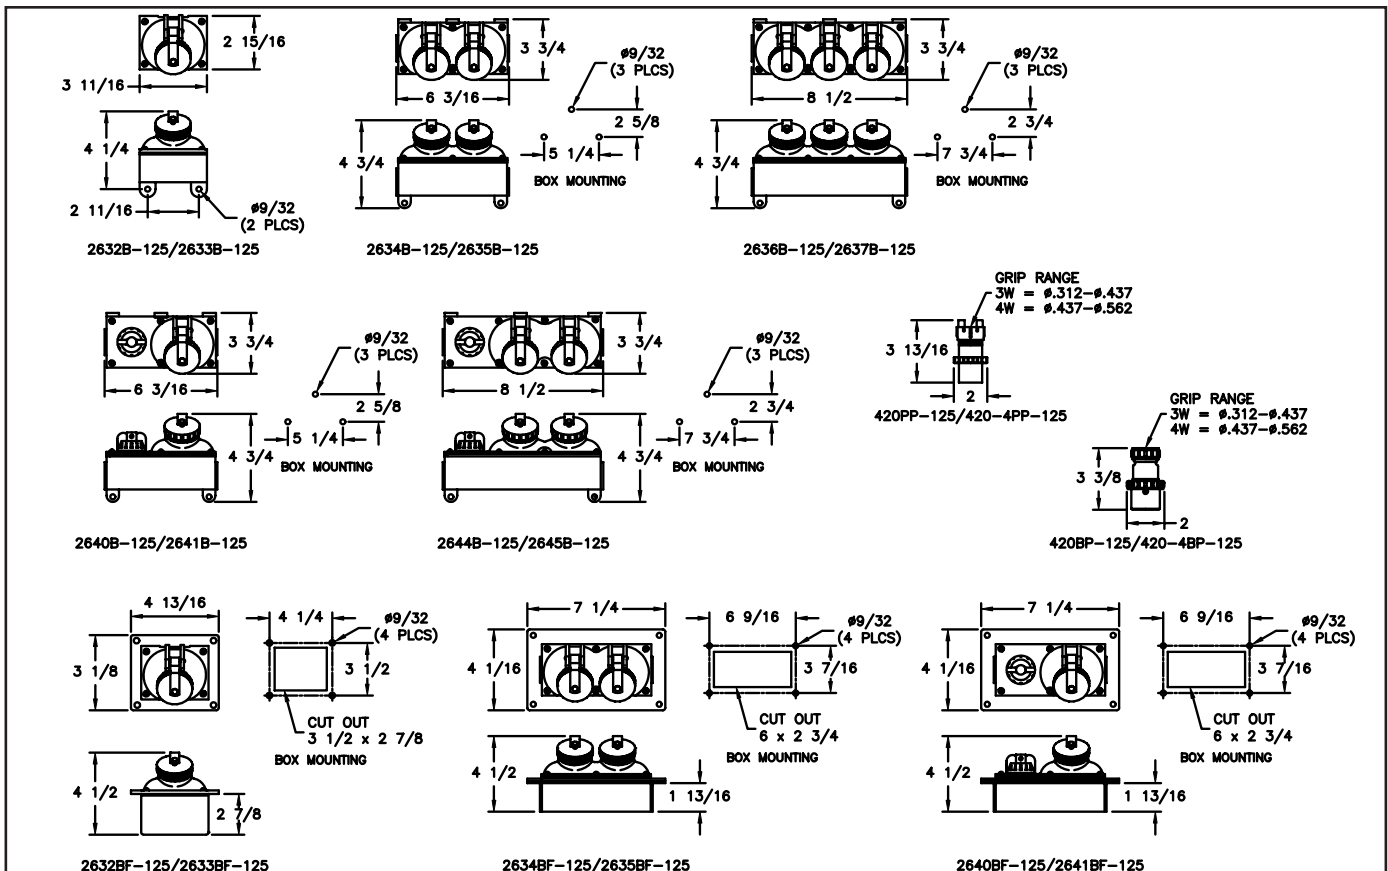

Dimensions in inches

# MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE OR FLUSH MOUNT



## TECHNICAL SPECIFICATION

### HOUSING

Heavy wall cast brass or copper-free marine-grade cast aluminum with a natural natural finish.

### HARDWARE

Stainless steel for all types.

### OUTLETS

All units are furnished blank but can be supplied with up to two 3/4" NPT outlets. Please state requirements on application.

### MOUNTING

Units are available for surface or flush mounting.

### VOLTAGE OPERATION

Double pole rotary switches are available for operation on 20 Amp 240v AC max.

### RECEPTACLES

All units are supplied for operation on 125v AC. Options for 2P3W units include 250v, 277v and 480v. 3P4W unit options are 208v, 250v, 480v and 600v. Single gang units can be supplied in reverse service, if required.

## ORDERING REFERENCES

### MARINE WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE AND FLUSH MOUNT

DESCRIPTION	BRASS WT (lbs)	BRASS (B) TYPE 2P3W	ALUMINUM (A) TYPE 2P3W	BRASS (B) TYPE 3P4W	ALUMINUM (A) TYPE 3P4W
One Receptacle for Surface Mount	2.8	2632B-125	2632A-125	2633B-125	2633A-125
Two Receptacles for Surface Mount	4.8	2634B-125	2634A-125	2635B-125	2635A-125
Three Receptacles for Surface Mount	6.5	2636B-125	2636A-125	2637B-125	2637A-125
One Receptacle with Double Pole Switch for Surface Mount	4.8	2640B-125	2640A-125	2641B-125	2641A-125
Two Receptacles with Double Pole Switch for Surface Mount	6.5	2644B-125	2644A-125	2645B-125	2645A-125
One Receptacle for Flush Mount	3.5	2632BF-125	2632AF-125	2633BF-125	2633AF-125
Two Receptacles for Flush Mount	5.8	2634BF-125	2634AF-125	2635BF-125	2635AF-125
One Receptacle with Double Pole Switch for Flush Mount	5.8	2640BF-125	2640AF-125	2641BF-125	2641AF-125
Metal Plug	0.8	420BP-125	420AP-125	420-4BP-125	420-4AP-125
Plastic Plug	0.3	420PP-125	420PP-125	420-4PP-125	420-4PP-125

## SPARE PARTS

SURFACE MOUNT UNITS			BRASS COVER	ALUMINUM COVER	BRASS BOX	ALUMINUM BOX	GASKETS
One Receptacle			INX6532B	INX6532A	INX6015B	INX6015A	GKT5002
Two Receptacles			INX6533B	INX6533A	INX6016B	INX6016A	GKT6007
Three Receptacles			INX6534B	INX6534A	INX6017B	INX6017A	GKT5022
One Receptacle with Switch			INX6535B	INX6535A	INX6016B	INX6016A	GKT6007
Two Receptacles with Switch			INX6637B	INX6637A	INX6017B	INX6017A	GKT5022
FLUSH MOUNT UNITS			BRASS COVER	ALUMINUM COVER	BRASS BOX	ALUMINUM BOX	COVER GASKET
One Receptacle			INX6532B	INX6532A	INX6018B	INX6018A	GKT5002
Two Receptacles			INX6533B	INX6533A	INX6019B	INX6019A	GKT6007
One Receptacle with Switch			INX6535B	INX6535A	INX6019B	INX6019A	GKT6007
INTERIORS	2P3W	3P4W	KNOB AND SHAFT ASSEMBLY		RECEPTACLE ADAPTERS		
Receptacle	INX3022-125	INX3023-125	Brass	INX8002B	2P3W 125V to 5-20R	INX3242PR-125	
Metal Plug	INX3143-125	INX3147-125	Aluminum	INX8002A	2P3W 125v to 6-20R	INX3242PR-250	
Plastic Plug	INX3103-125	INX3105-125					
SWITCHES	Double Pole	INX3192	CAPS	Brass	INX8004B	Aluminum	INX8004A

