



## FEATURES

- Double pole rotary switches rated for operation on 20 Amp 240v AC max, supplied standard on some models.
- Choice of corrosion resistant enclosures in heavy wall cast brass or copper-free marine-grade cast aluminum.
- Receptacles are supplied with 2P3W (U-Ground, Straight Blade type) 125v AC 15/20 Amp interior. 250v AC units are available as an option.
- Receptacles will accept 15A or 20A plugs.
- 5 year warranty.

## APPROVALS

- NEMA 5-15R, 6-15R, 5-20R, 6-20R
- ABS
- Type 4X
- Conforms to IP 66

## APPLICATIONS


- Marine and wet environments
- Offshore oil and gas platforms
- Drill ships and exploration vessels
- Tankers
- Ferries/Passenger Ships

## OPTIONS

To obtain a fixture with one of the following options listed below add the following suffix (not all option can be combined):

- 250v -250 (Replace 125 suffix)

## DIMENSIONS

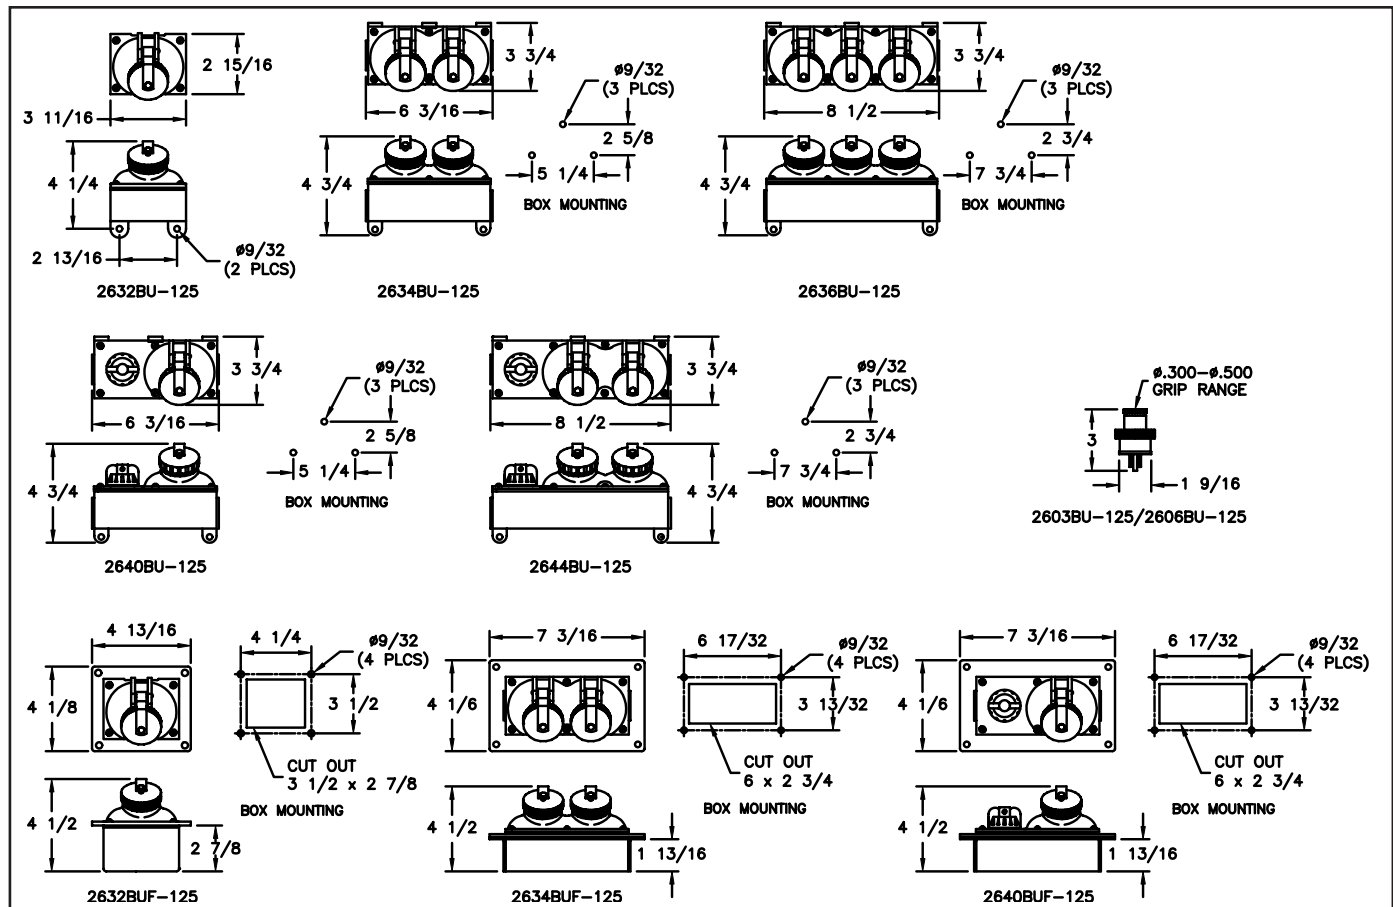

Dimensions in inches

# MARINE, OUTSIDE AND CORROSIVE ENVIRONMENTS WATERTIGHT SWITCHES AND RECEPTACLES FOR SURFACE FLUSH MOUNT



## TECHNICAL SPECIFICATION

### HOUSING

Heavy wall cast brass or copper-free marine-grade cast aluminum with a natural finish.

### HARDWARE

Stainless steel for all types

### OUTLETS

All units are furnished blank but can be supplied with up to two 3/4" NPT outlets. Please state requirements on application.

### MOUNTING

Units are available for surface or flush mounting.

### VOLTAGE OPERATION SWITCHES

Double pole rotary switches are available for operation on 20 Amp 240v AC max.

### RECEPTACLES

Receptacles are supplied with a 2P3W (U-Ground straight blade type) 125v AC 15/20 Amp interior. Alternatively a 250v rated interior can be supplied as an option.

## ORDERING REFERENCES

### MARINE WATERTIGHT SWITCHES ARE RECEPTACLES FOR SURFACE AND FLUSH MOUNT

DESCRIPTION	BRASS TYPE 20 AMP	BRASS (B) WEIGHT (lbs)	ALUMINUM (A) TYPE 20 AMP	ALUMINUM WEIGHT (lbs)
One Receptacle for Surface Mount	2632BU-125	2.75	2632AU-125	1.0
Two Receptacles for Surface Mount	2634BU-125	4.75	2634AU-125	2.1
Three Receptacles for Surface Mount	2636BU-125	6.50	2636AU-125	2.4
One Receptacle with Double Pole Switch for Surface Mount	2640BU-125	4.75	2640AU-125	1.7
Two Receptacles with Double Pole Switch for Surface Mount	2644BU-125	6.50	2644AU-125	2.1
One Receptacle for Flush Mount	2632BUF-125	3.50	2632AUF-125	1.3
Two Receptacles for Flush Mount	2634BUF-125	5.75	2634AUF-125	2.0
One Receptacle with Double Pole for Flush Mount	2640BUF-125	5.50	2640AUF-125	2.0

## PLUGS

15 Amp Brass 2603BU-125	15 Amp Aluminum 2603AU-125	20 Amp Brass 2606BU-125	20 Amp Aluminum 2606AU-125
-------------------------	----------------------------	-------------------------	----------------------------

## SPARE PARTS

SURFACE MOUNT UNITS	BRASS COVER	ALUMINUM COVER	BRASS BOX	ALUMINUM BOX	GASKETS
One Receptacle	INX6532B	INX6532A	INX6015B	INX6015A	GKT5002
Two Receptacles	INX6533B	INX6533A	INX6016B	INX6016A	GKT6007
Three Receptacles	INX6534B	INX6534A	INX6017B	INX6017A	GKT5022
One Receptacle with Switch	INX6535B	INX6535A	INX6016B	INX6016A	GKT6007
Two Receptacles with Switch	INX6537B	INX6537A	INX6017B	INX6017A	GKT5022

FLUSH MOUNT UNITS	BRASS COVER	ALUMINUM COVER	BRASS BOX	ALUMINUM BOX	COVER GASKET	BOX GASKET
One Receptacle	INX6532B	INX6532A	INX6018B	INX6018A	GKT5002	GKT5029
Two Receptacles	INX6533B	INX6533A	INX6019B	INX6019A	GKT6007	GKT5030
One Receptacle with Switch	INX6535B	INX6535A	INX6019B	INX6019A	GKT6007	GKT5030

RECEPTACLE INTERIORS	20 Amp 125v	20 Amp 250v	INO	KNOB AND SHAFT ASSEMBLY	SWITCHES
	INX3181	INX3182		Brass INX8002B	Double Pole INX3192
				Aluminum INX8002A	
				<b>CAPS</b> Brass INX8004B	Aluminum INX8004A

