



FEATURES

- ▼ Choice of 15 Amp receptacles, pilot lights, single pole or 3 way switches dependant on type.
- ▼ Switches are available in 125v or 277v AC max. Receptacles are available in 125v AC max only and pilot lights in 120v AC max.
- ▼ Choice of corrosion resistant enclosures in heavy wall cast brass, copper-free marine-grade cast aluminum or non-metallic.
- ▼ Pilot light features a 1/4 watt neon lamp which lights when the switch is activated.
- ▼ 5 year warranty.

APPROVALS

- ▼ NEMA 5-15R, 6-15R, 5-20R, 6-20R
- ▼ ABS
- ▼ Conforms to IP 20

APPLICATIONS


- ▼ Marine and wet environments
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

OPTIONS

To obtain a fixture with one of the following options listed below add the following suffix:

- ▼ Flush Mount Unit F

DIMENSIONS

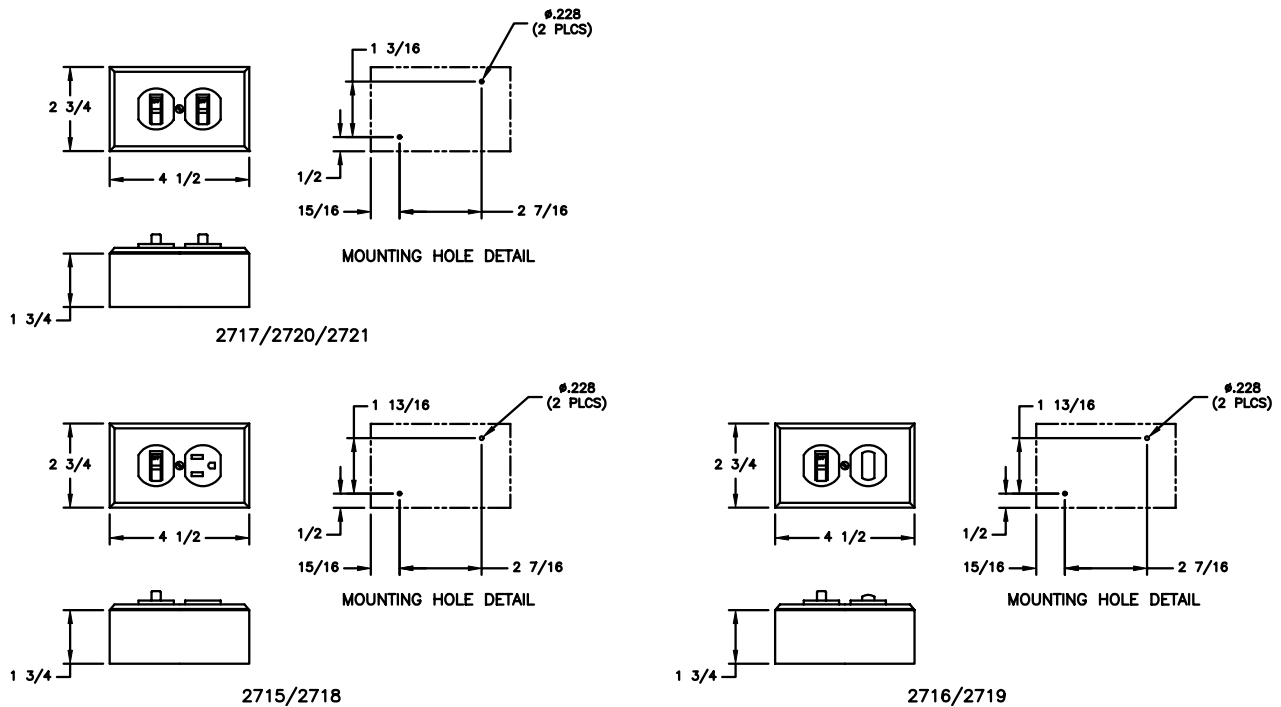

INSIDE TYPE RECEPTACLES AND SWITCHES FOR SURFACE OR FLUSH MOUNT



TECHNICAL SPECIFICATION

HOUSING

Heavy wall cast brass, copper-free marine-grade cast aluminum or non-metallic. The metallic units have boxes with a natural finish and covers in a brush finish. Brass units are supplied with brass covers and aluminum units with stainless steel covers.

HARDWARE

Stainless steel for all types.

OUTLETS

All units are furnished blank. They can be supplied with up to two ³/₄" NPT outlets as an option. Please state requirements on application.

PILOT LIGHT

Features a 1/4 watt neon lamp which lights when the switch is activated.

VOLTAGE OPERATION - RECEPTACLES

Rated for operation on 125v AC max on 15 Amp with NEMA 5-15R configuration.

SWITCHES

All units are furnished with single row switches rated for operation on 125v or 277v AC max 15 Amp.

PILOT LIGHTS

Rated for operation on 125v AC max on 15 Amp.

ORDERING REFERENCES

MARINE INSIDE TYPE SWITCHES AND RECEPTACLES

DESCRIPTION	AMP	VOLTAGE	BRASS WT (lbs)	BRASS TYPE	ALUMINUM TYPE	NON-METALLIC TYPE
One Receptacle with Single Pole Switch	15	277v AC Max	2.0	2715B	2715A	2715PL
One Receptacle with 3 Way Switch	15	125v AC Max	2.0	2718B	2718A	2718PL
Two Single Pole Switches	15	277v AC Max	2.0	2717B	2717A	2717PL
One Single Pole Switch and One Three Way Switch	15	277v AC Max	2.0	2720B	2720A	2720PL
Two Three Way Switches	15	277v AC Max	2.0	2721B	2721A	2721PL
One Single Pole Switch and Pilot Light	15	120v AC Max	2.0	2716B	2716A	2716PL
One Three Way Switch and Pilot Light	15	120v AC Max	2.0	2719B	2719A	2719PL

SPARE PARTS

INTERIORS		FLUSH COVERS (ALL UNITS)	
Receptacle with Single Pole Switch	INX3201	Brass	INX6689B
Receptacle with Three Way Switch	INX3229	Aluminum	INX6689A
Two Single Pole Switches	INX3199	Non-Metallic	INX6689PL
Two Three Way Switches	INX3232		
One Single Pole and One Three Way Switch	INX3231	STANDARD COVER (ALL UNITS)	
Pilot and Single Pole Switch	INX3200	Brass	INX6685B
Pilot and Three Way Switch	INX3230	Aluminum	INX66853A
		Non-Metallic	INX6685PL
BOX (ALL UNITS)			
Brass	INX6033B		
Aluminum	INX6033A		
Non-Metallic	INX6033PL		