



FEATURES

- ▼ Single throw double pole snap switch.
- ▼ Corrosion resistant enclosures in heavy wall cast brass.
- ▼ Surface mount type.
- ▼ Available in 15 Amp 120v AC, 10 Amp 24v DC, 2 Amp 125v DC, 20 Amp 600v AC, 15 Amp 24v DC or 5 Amp 125v DC dependant on type.
- ▼ 5 year warranty.


APPROVALS

- ▼ UL 698 - Industrial Control Equipment F/Hazardous Location
- ▼ Class I Division 1 Groups C & D
- ▼ UL 98 - Enclosed and Dead Front Switches
- ▼ ABS
- ▼ Conforms to IP 66

APPLICATIONS

- ▼ Hazardous Locations
- ▼ Offshore oil and gas platforms
- ▼ Drill ships and exploration vessels
- ▼ Tankers
- ▼ Ferries/Passenger Ships

DIMENSIONS

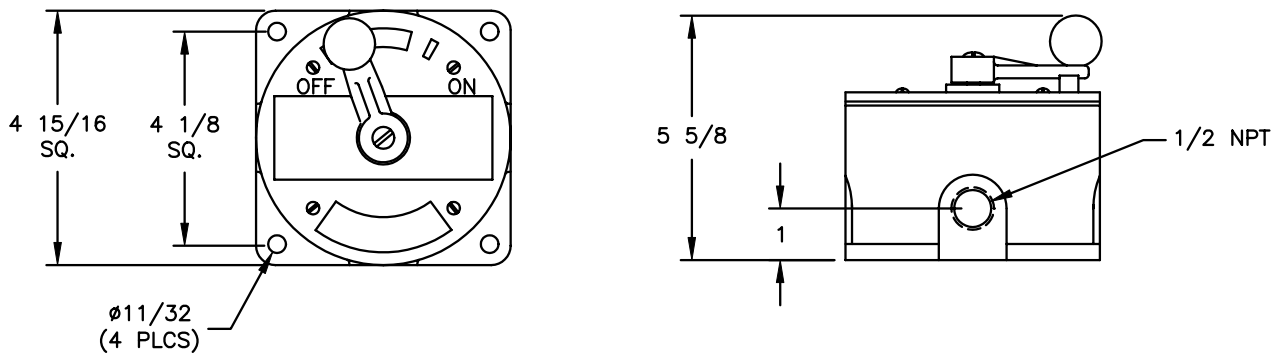

EP833/EP834

EXPLOSION PROOF CLASS I DIVISION 1 WATERTIGHT GENERAL ALARM CONTACT MAKER



TECHNICAL SPECIFICATION

HOUSING

Heavy wall cast brass. Units have natural finish castings.

HARDWARE

Stainless steel for all types.

OUTLETS

All units are furnished with one 1/2" NPT outlet but can be supplied with up to four 3/4" NPT outlets. Please state requirements on application.

SWITCHES

Both units have double pole single throw switches which are spring loaded.

VOLTAGE OPERATION

EP833 unit is rated for operation on 15 Amp 125v AC, 10 Amp 24v DC or 2 Amp 125v DC. The EP834 unit is rated for operation on 20 Amp 600v AC, 15 Amp 24v DC or 5 Amp 125v DC.

MOUNTING

Surface mounted via four 11/32" Ø mounting holes.

ORDERING REFERENCES

GENERAL ALARM CONTACT MAKERS

DESCRIPTION	WEIGHT (lbs)	BRASS TYPE
15 Amp 120v AC Surface Mount	10.0	EP833
20 Amp 600v AC Surface Mount	10.0	EP834

SPARE PARTS

BOX	INX6040B	INTERIOR SWITCHES EP833 INX3058 EP834 INX3118EP
HANDLE	INX8017B	
"O" RING	GKT1041	

