

Durable, Easy-mount Reflective Daymarks for Beacons

Standardized daymarks are available for nominal 1-mile and 2-mile visual ranges.


A variety of marking characteristics to fit the Federal Lateral System and the State Uniform Marking System may be ordered. API's signal engineers are ready to assist you in the application of these daymarks, from your system layout to completion of the "paperwork" required by the cognizant authority.

The pictured daymarks are **representative, but not inclusive. Specials**, such as high visual and vernier acuity targets for ranges are also available.

Retroflective borders and numbers are used so shape, color, and sequence significance are distinguishable both day and night. Red, orange and green backgrounds are produced with fluorescent film for high daylight conspicuity. Other backgrounds are pigmented film for lasting color and freedom from chalking. Maintenance is occasional washing with water. The paint brush is never required. Meets Mil Specs for fluorescent and pigmented films.

Basic boards are high density marine-grade plywood with an acrylic overlay on front and back. Edges are sealed with long-life sealant for maximum life with minimal maintenance.

The rigid boards, mounted with two properly-sized washered bolts will withstand gale-force winds. Brackets or other mounting hardware are available to customer specification.

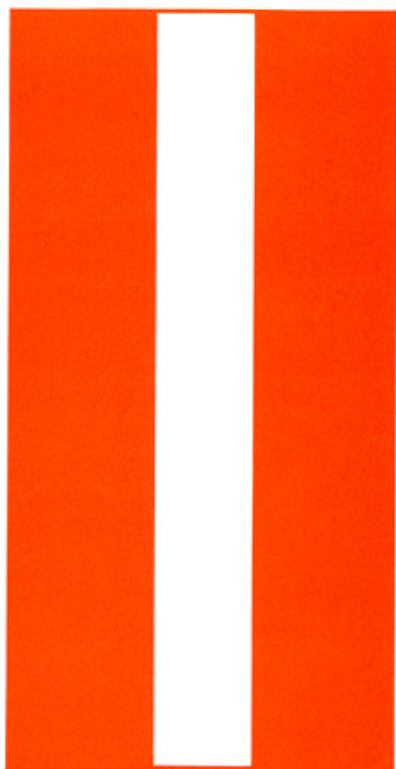

Automatic Power Inc

Post Office Box 23078 • Houston, Texas 77223 • (713) 228-5208 Telex: 76-2853 • Fax (713) 228-3717