


Fluorescent Lamp Guide

Lamp Data			Lamp Manufactures Catalog Numbers			NRL #
Nominal Length	Base	Lamp Input	GE Lamp #	Osram/Sylvania #	Philips #	
22-1/2"	2G11	270 mA	F40/30BX/SPX41	FT40DL/841/RS	PL-L40W/41/RS	727-4041
2' to the back of socket	G13	265 mA	F17T8/SP41	FO17/741	F17T8/TL741	726-1741
	R17d	800 mA	F24T12CW/HO	F24T12CW/HO	F24T12CW/HO	780-2400
4' to back of socket	G13	265 mA	F32T8/SPX41	FO32/841	F32T8/TL841	726-3341
		430 mA	F40CW/RS/WM	F40CW/SS	F40CW/RS/EWII	743-4000
	R17d	800 mA	F48T12CW/HO	F48T12CW/HO	F48T12CW/HO	780-4800
		Fa8	425 mA	F96T12/CW/WM	F96T12/CW/SS	F96T12/CW/EW
8' to the back of socket	R17d	800 mA	F96T12CW/HO/CT	F96T12CW/HO	F96T12CW/HO-O	780-9600
	Fa8	200 mA	F96T8/SP41	FO96/741	F96T8/TL741	720-9600
	R17d	800 mA	F96T8/SP41/HO		F96T8/TL841/HO	780-9608

Compact fluorescent lamps available for all "Pro" series fixtures, 2 & 4 foot designs.




Lamp Data				Lumens 2 lamps	Ballast		Fixture Watts*	Lumens	
Length	Base	Style	Catalog Number		Type	Factor		Per Watt*	Per fixture
22-1/2"	2G11	270mA T5	F40/30BX/RS	6,300	Magnetic	0.95	85	70	5,985
					Electronic	1.00			

* Note: All calculations are based on 2 lamp fixtures.

Two foot fluorescent lamps available for all "Pro" series fixtures.

(VersaPro is the only exception, the T12 / 800mA lamp is not available)

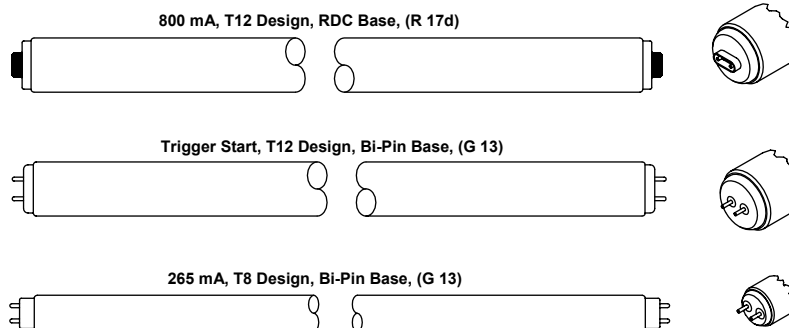


Lamp Data				Lumens 2 lamps	Ballast		Fixture Watts*	Lumens	
Length	Base	Style	Catalog Number		Type	Factor		Per Watt*	Per fixture
24" / 610mm (Back of sockets)	Bi-Pin G 13	265 mA T8	F17T8/SPX41	2750	Magnetic	0.96	44	60	2,640
			F17T8/SPX41	2750	Electronic	0.92	36	70	2,502
		TS, T12	**F20T12/CW	2400	Magnetic	0.85	51	40	2,040
	RDC R17d	800 mA, T12	F24T12CW/HO	3240	Magnetic	0.83	100	27	2,689

* Note: All calculations are based on 2 lamp fixtures.

** Shown for reference only, older design with limited selection of color temperatures.


Fluorescent Lamp Guide

Four foot fluorescent lamps available for all “Pro” series fixtures.
 (VersaPro & WashPro 8 foot fixtures are also available in tandem 4 foot lamp design)

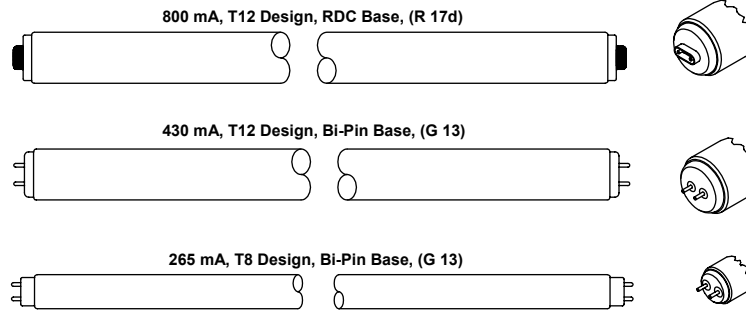

Lamp Data				Lumens 2 lamps	Ballast		Fixture Watts*	Lumens	
Length	Base	Style	Catalog Number		Type	Factor		Per Watt*	Per fixture
48" / 1220 mm (Back of sockets)	Bi-Pin G 13	265 mA T8	F32T8/SPX41	5900	Magnetic	0.95	74	76	5,605
					Electronic	1.18	76	91	6,962
		430 mA T12	F40CW/RS/WM	5300	Magnetic	0.90	74	64	4,770
					Electronic	0.86	64	71	4,558
	RDC R17d	800 mA T12	F48T12CW/HO	8100	Magnetic	0.85	137	50	6,885

Eight foot fluorescent lamps available for all “Pro” series fixtures.
 (8 foot designs available in VersaPro & WashPro models only)

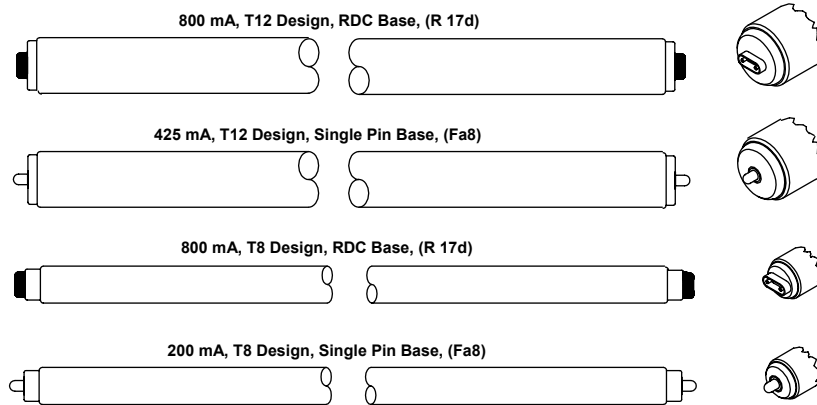

Lamp Data				Lumens 2 lamps	Ballast		Fixture Watts*	Lumens	
Length	Base	Type	Catalog Number		Type	Factor		Per Watt*	Per fixture
96" / 2440 mm (Back of sockets)	Single pin Fa8	200 mA T8	F96T8/SPX41	11,900	Magnetic	0.93	120	92	11,067
					Electronic	0.88	112	94	10,472
		425 mA T12	F96T12/CW/WM	11,000	Magnetic	0.91	133	75	10,010
					Electronic	0.88	107	90	9,680
	RDC R17d	800 mA T12	F96T12CW/HO/CT	17,800	Magnetic	0.95	237	71	16,910
					Electronic	0.90	208	77	16,020
		800 mA, T8	F96T8/SPX41/HO	16,400	Electronic	0.88	160	90	14,432

* Note: All calculations are based on 2 lamp fixtures.